




OVERVIEW AND SETTING

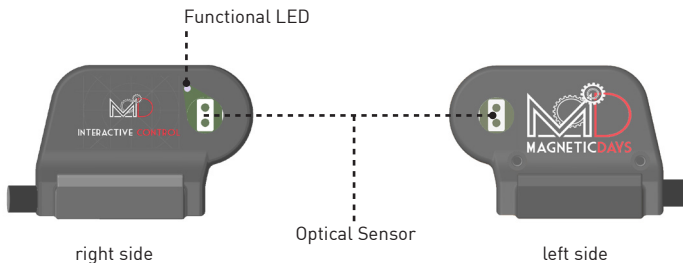

POSITIONING


Apply the device on the handlebar of the bicycle with the O-Ring in a convenient position.
(see back page)

CONNECTION WITH MAGNETICDAYS

Plug the Optical Key cable into one of the two USB sockets of the smart trainer (1° or 2° starting from the bottom).

REMOTE CONTROL

Occlude the right or left optical windows for about 2 seconds to adjust (+/-) the workloads.

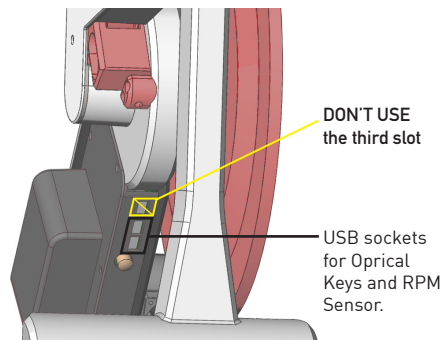

In case of cabled RPM sensor, insert the cable into the remaining USB socket.

POSITIONING

The correct positioning of the device on the handlebar is important for the successful operation of the optical sensor.

Apply the Optical Keys in the recommended position 1 or 2.

POSITION 1 | SUPERIOR

IMPORTANT The device must be positioned at a forward angle so that it doesn't interfere with the sensor.



POSITION 2 | LATERAL

The device must be placed in a position that is accessible but doesn't obstruct the position of your hands on the handlebar.



WARNING

Pay particular attention to avoid covering the sensors with objects or your body during the workout.

It may cause interference and therefore a malfunction of the connection to the platform.